

**POSITION TRANSMITTER**  
**2 WIRE – NON -CONTACT – HALL EFFECT**

**MODEL: RMG -HPT2W-2018**



**DESCRIPTION**

**RMG-HPT2W-2018** is a 2 wire Position Transmitter, widely used to transmit the position of a Control Valve in a variety of process control applications. The Contactless Hall effect based Position Transmitter is a 24V DC operated 2Wire System, which accepts angular movements ranging from 0° to 15° to 0° to 90° and converts into 4.00 to 20.00mA signal when suitable back lever and linkages are used.

**SALIENT FEATURES**

- Non-contact, Hall Effect type.
- User friendly & easy calibration.
- Accepts a wide supply voltage range.
- Wide operating temperature range.
- Minimal effect of ambient temperature variance on accuracy.
- Encapsulated electronics - to protect from moisture, vibration and tampering of the circuitry.
- Compact in size as compared to other position transmitters available in the market.
- Linearity can be adjusted for a maximum of 15 Points in the operating range.
- High accuracy with minimal Linearity and Hysteresis errors.
- Reverse Polarity protected.
- High Isolation and Dielectric strength.
- Suitable for use in very low stroke as well as for very high stroke applications.
- Die-cast enclosure capable of enduring high hydro static pressure and with high ingress protection. Complies with IP 67 requirements as per IS/IEC 60529 standard.

**APPLICATION**

- Position control, monitoring and feedback.
- Custom built operations.



**SPECIFICATION**

SI No	Characteristics	Specified value
1	Input	Angular movements ranging from 0-15° to 0-90°
2	Output	4.00 to 20.00mA
3	Input Supply Voltage Range	12V DC to 60 V DC
4	Influence of Input Supply Voltage	≤0.2% of span
5	Type of Transmitter	Two wire
6	Type of Sensor	Hall Effect, Non contact
7	Load Impedance	600 Ω at 24 V DC
8	Burden Effect	>0.1%/600 Ω
9	Residual Ripple	<0.5% of I <sub>max</sub>
10	Response time for full range	<0.2S
11	Operating Temperature Range	-20° C to +80 ° C
12	Effect of Temperature	≤0.1% / 10°C
13	Linearity Error	≤ 0.5% of span
14	Hysteresis Error	≤ 0.5% of span
15	Zero Adjustment	Independent adjustment using Push Button Switch, Current adjustment possible from 03.70mA to 07.00mA typical using trimpot
16	Span Adjustment	Independent adjustment using Push Button Switch, Current Adjustment possible from 17.00mA to 23.00mA typical using trimpot.
17	Linearity Adjustment	Current at midpoints can be adjusted from -2.50 to +2.50mA from the actual reading using trimpot. A maximum of 15 points can be adjusted.
18	Direction Selection	Using Dip Switch
19	Connector	Screw type Terminals.
20	Built in Protection	Sensor and Converter are epoxy moulded for protection from moisture, vibration and tampering of circuitry. Isolation at 500V DC ≥500MΩ. Dielectric strength ≥1.5KV rms for 1 Minute. Reverse Polarity protected. Enclosure withstands hydrostatic pressure upto 10Kg/cm <sup>2</sup> for 1 Minute.
21	<u>Enclosure Details</u>	
	a) Size	Ø92mm, Height – 125mm
	b) Weight	1 Kg approx.
	c) Material & finish	Aluminum (LM6) gravity die-cast; Enamel painted & oven baked.
	d) Enclosure Protection (Safety and Sealing)	Complies with the Ingress Protection requirements of IP 67 as per IS/IEC 60529 standard


In addition , we design and manufacture POSITION TRANSMITTERS AS PER CUSTOMER REQUIREMENTS/ SPECIFICATION



Top View



Open View

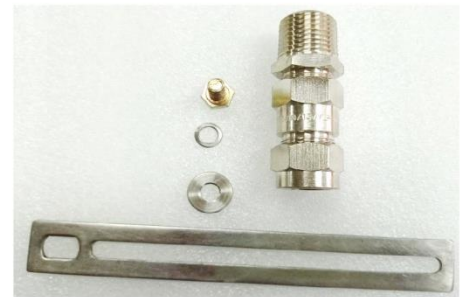

Mounting Accessories

Note : Due to continuous product improvement initiatives, specification is subject to change