

POSITION TRANSMITTER 2 WIRE- RESISTIVE

MODEL: RMG-2WRPT-2012



DESCRIPTION

RMG-2WRPT-2012 is a 2wire Electronic Position Transmitter based on resistive sensor inputs capable of transmitting precisely the changes in position. The sensor is a potentiometer and is used for transmitting signals proportional to the rotary / linear movements, resulting in resistance changes. Position Transmitter RMG-2WRPT-2012 produces a linear current signal proportional to the position of the actuator/valve in a position feedback monitoring application.

SALIENT FEATURES

- Very high Position Accuracy
- Encapsulated To protect from moisture, vibration and tampering
- Operates over a wide temperature range
- Rugged engineering design and packaging
- Reverse polarity protected
- Operates over a wide supply voltage range
- Wide range of resistance values as transducer
- Long term reliability
- Fool-proof design
- User friendly controls
- Competitive pricing.

APPLICATION

Used in power generation & various process control applications




Redefining Mechatronics Globally

Corporate Office and Works: **RMG Electromech (P) Ltd**, No. 41&42, SMR Layout, 2nd Main, 1st Cross, Kereguddadahalli, Chikkabanavara P.O, Bangalore-560 090. Tel: +91-80-23253325/26/27.Mob: +91-9341216734 . email: marketing@rmgpl.com,info@rmgpl.com web :www.rmgpl.com An ISO 9001:2015 Certified Company... OEM Supplier to MNCs Since 1990



SPECIFICATION

SI No	Characteristics	Specified Value
1	Transducer Configuration	Two Wire
2	Supply Voltage (Typical)	24 V DC
3	Input Supply Voltage Range	6V DC to 60 V DC
4	Influence of Input Supply Voltage	≤0.5% of span
5	Input Transducer (Resistive)	5K Potentiometer (other options are available on request)
6	Output Current	4.00 to 20.00mA
7	Load Impedance Max	900 Ω at 24 V DC
8	Adjustability of Span	+60%, -15% of span
9	Adjustability of Zero	+35%, -10% of span
10	Linearity Error	≤0.2% of span
11	Hysteresis Error	≤0.05% of span
12	Operating Temperature Range	-20 ° C to +80 ° C
13	Effect of Temperature	≤0.3%/10° C
		Housed in a Glass- filled - nylon G6 enclosure
14	Built in Protection	Epoxy moulded for protection from moisture, vibration and tampering of circuitry
14		Reverse Polarity Protected
15	Size	74L x 54W x 21 H mm
16	Weight	≤150 gm
17	Enclosure	Glass Filled Nylon G6

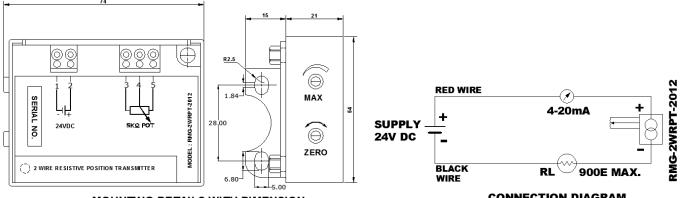

MOUNTING DETAILS WITH DIMENSION



Note 1: Due to continuous product improvement initiatives, specification is subject to change. Note 2: Images provided are for indicative purpose only. Note 3: In addition, we design and manufacture POSITION TRANSMITTER as per customer requirements/specifications

Corporate Office and Works: RMG Electromech (P) Ltd, No. 41&42, SMR Layout, 2nd Main, 1st Cross, Kereguddadahalli, Chikkabanavara P.O, Bangalore-560 090. Tel: +91-80-23253325/26/27.Mob: +91-9341216734 .

email: marketing@rmgpl.com,info@rmgpl.com web :www.rmgpl.com

An ISO 9001:2015 Certified Company... OEM Supplier to MNCs Since 1990